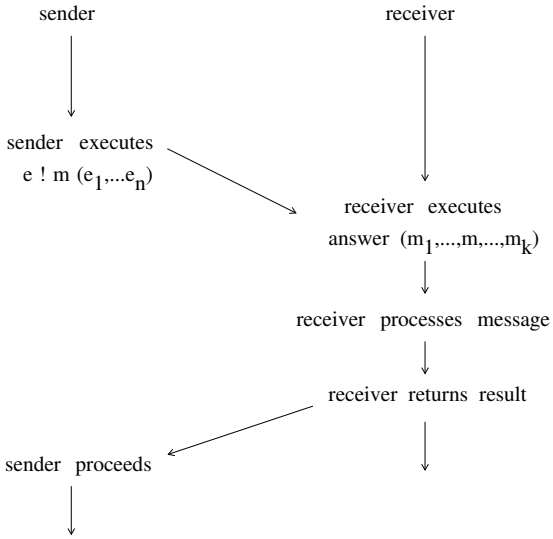
sender
receiver
sender executes
e ! m (e1,...en)
receiver executes
answer (m1,...,m,...,mk)
receiver processes message
receiver returns result
sender proceeds